


DN	ØP	S	H	V	M	Peso gr Weight gr	Conf. Box
1/2"	15	60.5	69	82	17	210	80
3/4"	20	69	73	82	18.5	300	54
1"	25	80.5	79	82	21	502	48
1"1/4	32	93	87	82	23.5	730	24
1"1/2	40	103	93	82	24	990	18

Valvola a sfera in ottone a passaggio totale F.F. con maniglia **ISO-T/S** per impianti ad isolamento termico. **Alta temperatura.**

Full flow F.F. brass ball valve with ISO-T/S handle for thermal insulation installations. **High temperature**

## 520S

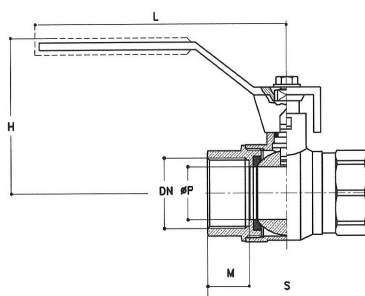

DN	ØP	S	H	L	M	Peso gr Weight gr	Conf. Box
1/2"	15	60.5	52	88	17	200	100
3/4"	20	68.9	56	88	18.5	285	80
1"	25	80.4	66	115	20.5	525	48
1"1/4	32	93	71	115	22.3	750	20
1"1/2	40	103	75	115	23.2	1020	15
2"	50	125	95	145	27.3	1740	10

Valvola a sfera in ottone a passaggio totale F.F. Leva in acciaio zincato + guaina in PVC per impianti ad isolamento termico. **Alta temperatura.**

Messing Kugelhahn mit vollem Durchfluss IG/IG. Hebel aus verzinkten Stahl + PVC schutzmantel for thermal insulation installations. **High temperature**

## 220S